

graduate

Seat Unit

405mm deep, 12mm thick plywood/MDF base upholstered with 50mm CMHR cushion and covered with material. A polished, painted or upholstered plywood panel is fitted to the underside of seat. Counterweight tipping action.

Backrest

300mm deep, 6mm thick pre-formed plywood inner frame supporting a 25mm CMHR cushion, covered with material. A 6mm thick pre-formed plywood outerback is available with polished or painted finish to supporting metalwork with tee nuts and set screws.

Writing Tablets

See chart for width, 18mm thick MDF laminated on both sides with plain laminate. Edges filled and polished. Fitted to supporting metalwork. Other finishes available on request.

Pivot Mechanism

Counterweight Tip, upholstered seat supported on pressed angle brackets, securely fitted to base. Nylon buffer and pivot bush fitted to prevent any metal to metal contact.

Front Barrier

Writing facilities are provided for the front row chairs complete with matching fascia 500mm deep (15mm thick MDF) fitted to supporting metalwork.

Back Row Chairs

No writing facilities are provided on the rear

Covering Material

A wide range of covering materials are available.



Upholstery

All upholstery passed BS 5852 Parts 1&2, Ignition Source 5

Since our policy is one of continuous improvement, we reserve the right to change the specifications of the products described on this card

Table for writing tablet widths (300mm walkway)

Tread Width (mm)	800	850	900	950	1000	1050
	Writing Tablet Widths (mm)					
level	240	290	340	390	440	490
100	220	270	320	370	420	470
150	210	260	310	360	410	460
200	200	250	300	350	400	450
250	190	240	290	340	390	440
300	180	230	280	330	380	430
350	170	220	270	320	370	420
400	155	205	255	305	355	405
450	145	195	245	295	345	395

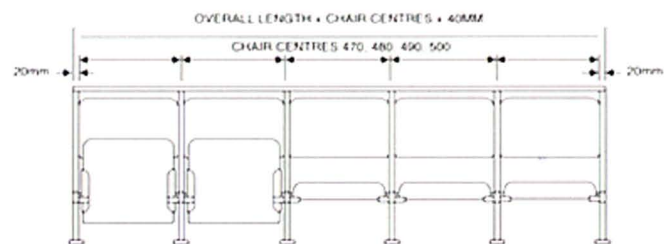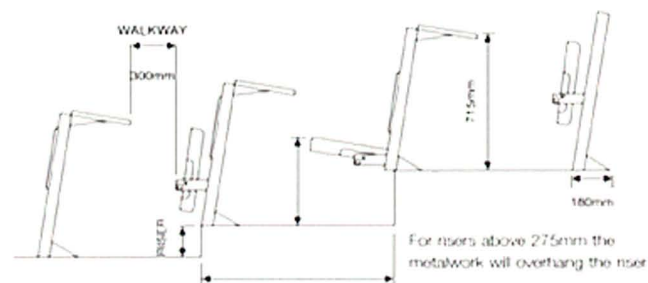



graduate